

# Programming Example: Create a stair-step waveform using MATLAB (SDG1000X, SDG2000X, SDG6000X)


March 10, 2022

The SIGLENT SDG series of arbitrary waveform generators can use waveforms created programmatically.

The waveform data can be sent as individual samples formatted as binary little-endian, 2s complement values.

In this programming example, we create a 10 point arbitrary waveform that starts at the least-significant bit and steps up to the most-significant bit to help with understanding the required sample format as well as provide a base for your own waveform creation.

Here is a picture of the desired waveform:

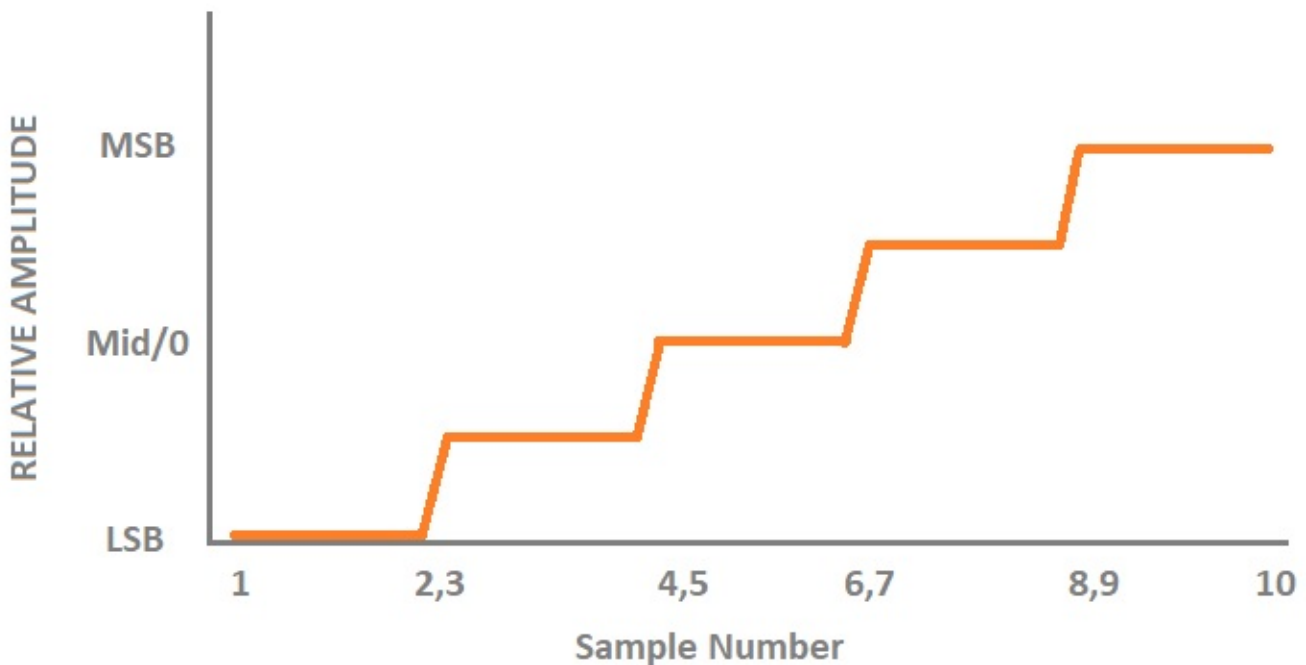


The SDG waveform data requires each sample to first be formatted as binary, little-endian, 2's complement. For easier human viewing, the example enters the data in hex format and then "unhexes" the data before it is added to the command string which is then sent to the instrument.

Here is a table showing the value of each sample and the value in hex for 14-bit (SDG1000X series) and 16-bit (SDG2000X/SDG6000X) instruments:

Sample Number/Description	Decimal Value (14-bit range)	Hex Value (14-bit range)	Decimal Value (16-bit range)	Hex Value (16-bit range)
1 (LSB)	-8192	0xe000	-32768	0x8000
2 (LSB)	-8192	0xe000	-32768	0x8000
3 (Mid - LSB/2)	-4096	0xf000	-16384	0xc000
4 (Mid - LSB/2)	-4096	0xf000	-16384	0xc000
5 (Mid)	0	0x0000	0	0x0000
6 (Mid)	0	0x0000	0	0x0000
7 (MSB - Mid/2)	4096	0x1000	16384	0x4000
8 (MSB - Mid/2)	4096	0x1000	16384	0x4000
9 (MSB)	8192	0x2000	32768	0x8000
10 (MSB)	8192	0x2000	32768	0x8000

Here is an oscilloscope capture of a single burst of this waveform:

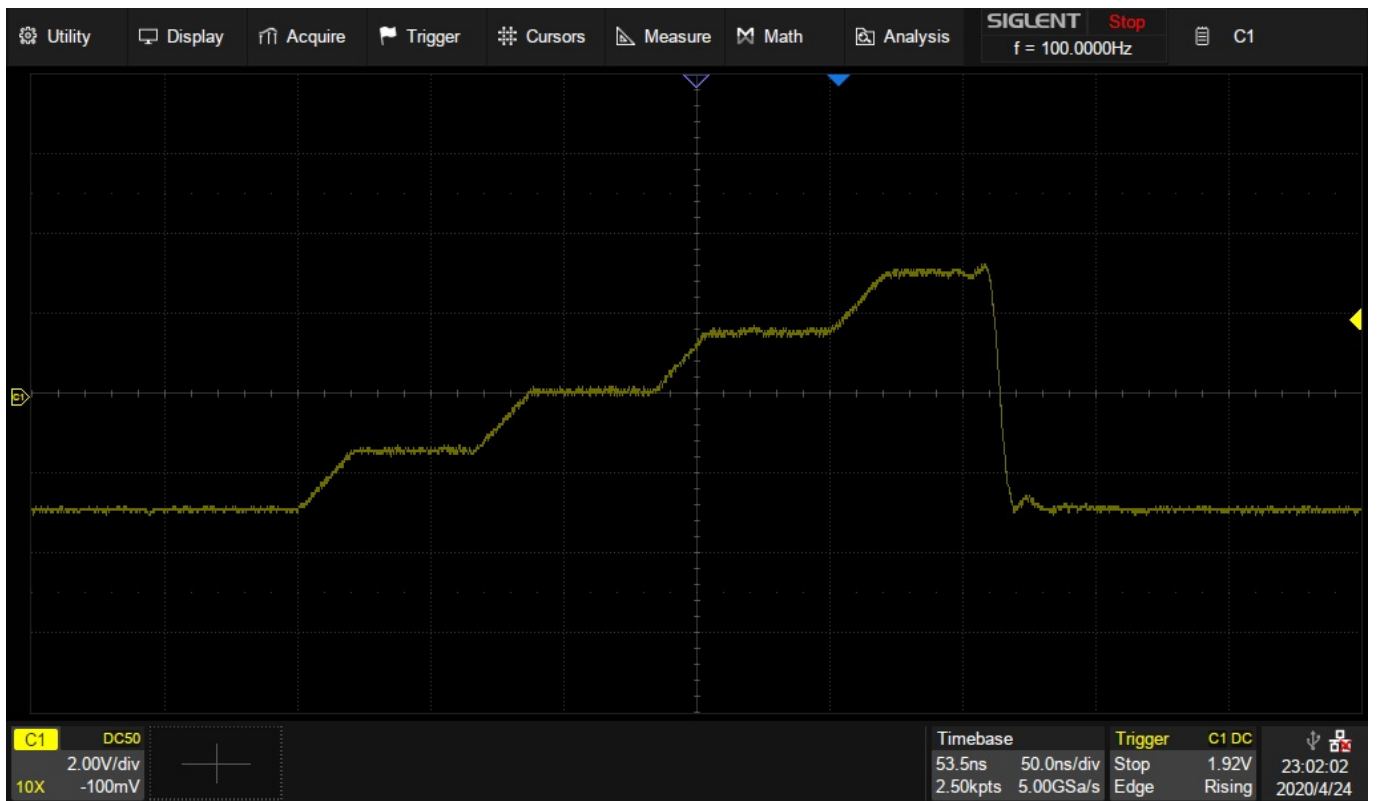

## MATLAB Example

Here is a [MATLAB SDG Stair Step Example](#)



### **North American Headquarters**

SIGLENT Technologies America, Inc  
6557 Cochran Rd Solon, Ohio 44139  
Tel: 440-398-5800  
Toll Free:877-515-5551  
Fax: 440-399-1211  
[info@siglent.com](mailto:info@siglent.com)  
[www.siglentamerica.com/](http://www.siglentamerica.com/)

### **European Sales Offices**

SIGLENT TECHNOLOGIES EUROPE GmbH  
Staetzlinger Str. 70  
86165 Augsburg, Germany  
Tel: +49(0)-821-666 0 111 0  
Fax: +49(0)-821-666 0 111 22  
[info-eu@siglent.com](mailto:info-eu@siglent.com)  
[www.siglenteu.com](http://www.siglenteu.com)

### **Asian Headquarters**

SIGLENT TECHNOLOGIES CO., LTD.  
Blog No.4 & No.5, Antongda Industrial Zone,  
3rd Liuxian Road, Bao'an District,  
Shenzhen, 518101, China.  
Tel:+ 86 755 3661 5186  
Fax:+ 86 755 3359 1582  
[sales@siglent.com](mailto:sales@siglent.com)  
[www.siglent.com/ens](http://www.siglent.com/ens)