


# Programming Example: SDG waveform creation with Python and Sockets (no VISA)

December 15, 2022

Here is a programming example using Python and Sockets over LAN to create a two-point waveform.

Sockets via LAN can be helpful if you wish or are unable to use the VISA library.

Here is a picture of the data once it has been loaded into the SDG:

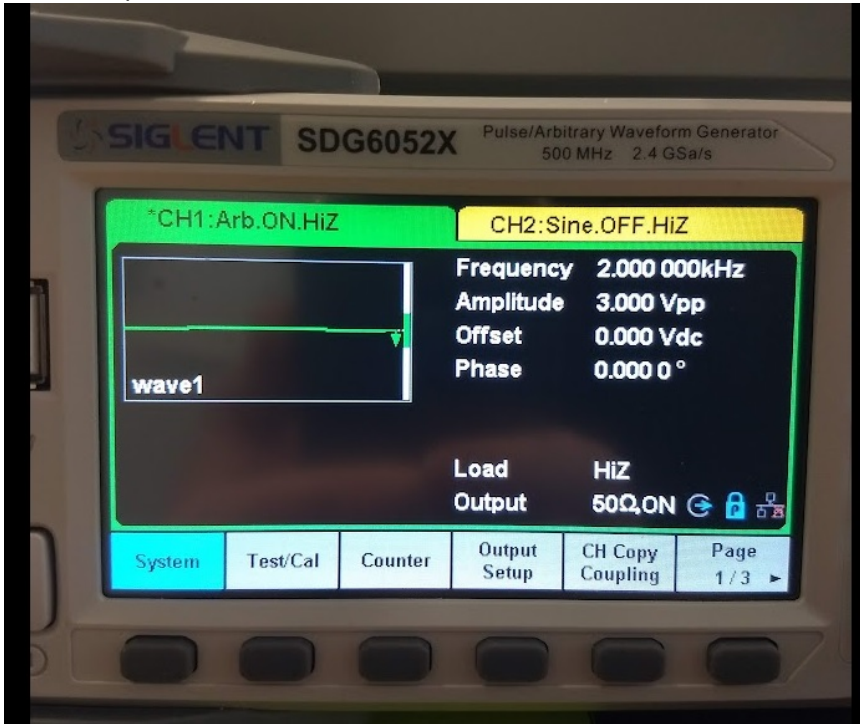

Here is a picture of the generator output on the controlling computer:

```
Python 3.6.5 Shell
File Edit Shell Debug Options Window Help
Python 3.6.5 (v3.6.5:f59c0932b4, Mar 28 2018, 17:00:18) [MSC v.1900 64 bit (AMD64)] on win32
Type "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: E:\SDG Python Socket Demo.py =====
write bytes: 4
Exit.
>>> |
```

Here is the generator output on an oscilloscope:



You can download the Python .py script here:

[SDG Python Socket Demo](#)

```
import socket
import sys
import time
import binascii

remote_ip = "192.168.1.84"
port = 5025
count = 0

wave_points = [0x8000, 0x3f06]

for i in range (1000):
    wave_points = wave_points + [0x8000, 0x3f06]

def SocketConnect():
    try:
        s = socket.socket(socket.AF_INET, socket.SOCK_STREAM)
    except socket.error:
        print('Fail to creat socket.')
        sys.exet();
```

```
try:
    s.connect((remote_ip, port))
except socket.error:
    print('failed to connect to ip' + remote_ip)
return s

def SocketQuery(Sock, cmd):
    try:
        Sock.sendall(cmd)
        time.sleep(1)
    except socket.error:
        print('Send failed')
        sys.exit()
    reply = Sock.recv(4096)
    return reply

def SocketSend(Sock, cmd):
    try:
        cmd = cmd + '\n'
        Sock.sendall(cmd.encode('latin1'))
        time.sleep(1)
    except socket.error:
        print('Send failed.')
        sys.exit()

def SocketClose(Sock):
    Sock.close()
    time.sleep(.300)

def create_wave_file():
    f = open('wave1.bin', 'wb')
    for a in wave_points:
        b = hex(a)
        b = b[2:]
        len_b = len(b)
        if(0 == len_b):
            b = '0000'
        elif(1 == len_b):
            b = '000' + b
        elif(2 == len_b):
            b = '00' + b
        elif(3 == len_b):
            b = '0' + b
        c = binascii.a2b_hex(b)
        f.write(c)
    f.close()
```

```
def main():
    global remote_ip
    global port
    global count

    create_wave_file()
    s = SocketConnect()
    f = open('wave1.bin', 'rb')
    data = f.read().decode('latin1')
    data1 = data.encode('latin1')
    with open('wave2.bin', 'wb') as f1:
        f1.write(data1)
    print('write bytes:', len(data))
    data = str(data)
    SocketSend(s, "C1:WVDT
WVNM, wave1, FREQ, 2000.0, AMPL, 3.0, OFST, 0.0, PHASE, 0.0, WAVEDATA, %s"%(data))
    SocketSend(s, 'C1:ARWV NAME, wave1')
    f.close()
    SocketClose(s)
    print('Exit.')
```

```
if __name__ == '__main__':
    proc = main()
```



### **North American Headquarters**

SIGLENT Technologies America, Inc  
6557 Cochran Rd Solon, Ohio 44139

Tel: 440-398-5800

Toll Free: 877-515-5551

Fax: 440-399-1211

[info@siglent.com](mailto:info@siglent.com)

[www.siglentamerica.com/](http://www.siglentamerica.com/)

### **European Sales Offices**

SIGLENT TECHNOLOGIES EUROPE GmbH

Staetzlinger Str. 70

86165 Augsburg, Germany

Tel: +49(0)-821-666 0 111 0

Fax: +49(0)-821-666 0 111 22

[info-eu@siglent.com](mailto:info-eu@siglent.com)

[www.siglenteu.com](http://www.siglenteu.com)

### **Asian Headquarters**

SIGLENT TECHNOLOGIES CO., LTD.

Blog No.4 & No.5, Antongda Industrial Zone,

3rd Liuxian Road, Bao'an District,

Shenzhen, 518101, China.

Tel: + 86 755 3661 5186

Fax: + 86 755 3359 1582

[sales@siglent.com](mailto:sales@siglent.com)

[www.siglent.com/ens](http://www.siglent.com/ens)