

SDG6000X Series Pulse/Arbitrary Waveform Generator



Data Sheet
EN02D



SIGLENT TECHNOLOGIES CO.,LTD

SDG6052X

SDG6032X

SDG6022X







Overview

SIGLENT's SDG6000X is a series of dual-channel Pulse/Arbitrary Waveform Generators that feature up to 500 MHz bandwidth, a maximum sample rate of 2.4 GSa/s and 16-bit vertical resolution. They also include proprietary TrueArb & EasyPulse technology that help to solve the weaknesses inherent in traditional DDS generators when generating arbitrary, square and pulse waveforms. In addition, the SDG6000X is a multi-function device which can generate Noise, IQ signals, PRBS patterns, sequence wave output and dual pulse output functions. These features enable the SDG6000X to provide a variety of high fidelity and low jitter signals, meeting the growing requirements of complex and intensive applications.



Key Features

- Dual-Channel, 500 MHz maximum bandwidth, 20 Vpp maximum output amplitude, high fidelity output with 80 dB dynamic range
- High-performance sampling system with 2.4 GSa/s sampling rate and 16-bit vertical resolution
- Multi-function signal generator, meeting requirements in wide range

	Continuous Wave Generator	Up to 500 MHz sine wave, supporting sweep and user-defined harmonics. Low cost replacement of RF signal generators below 500 MHz
	Pulse Generator	Up to 150 MHz Pulse, with finely adjustable width, rising edge and falling edge; 3.3 ns minimum width and 1 ns minimum edge at full frequency range
	Function Arbitrary Waveform Generator	Basic Function/Arbitrary Waveform Generator and complex signals generating capability including modulation, sweep, burst and waveform combination.
	IQ Signal Generator (optional)	Base Band and IF IQ signals supporting basic modulation and an arbitrary symbol rate between 250 Symb/s ~ 37.5 MSymb/s
	Noise Generator	Up to 500 MHz bandwidth White Gaussian Noise with adjustable bandwidth
	PRBS Generator	Up to 300 Mbps PRBS3 ~ PRBS32 with fine bit rate and edge adjustments


- Sweep and Burst function
- Plenty of analog and digital modulation types: AM, DSB-AM, FM, PM, FSK, ASK, PSK and PWM
- Harmonics function
- Multi-pulse output function can be used to measure the switching parameters of power devices and evaluate its dynamic characteristics
- Supports sequence wave playback function, maximum storage depth per channel 20 Mpts
- Waveform Combining function
- Channel Coupling, Copy and Tracking function
- 196 built-in arbitrary waveforms
- High precision Frequency Counter
- Standard interfaces include: USB Host, USB Device (USBTMC), LAN (VXI-11, Socket, Telnet). Optional Interface: GPIB
- 4.3" touch screen display for easier operation

Models and Key Specifications

Model	SDG6022X	SDG6032X	SDG6052X
Bandwidth	200 MHz	350 MHz	500 MHz
Number of channels	2		
Sampling rate	2.4 GSa/s (2X Interpolation)		
Vertical resolution	16 bit		
Arbitrary waveform length	32 ~ 20 Mpts		
Display	4.3" touch screen display, 480 x 272 x RGB		
Interface	Standard: USB Host, USB Device, LAN Optional: GPIB (USB-GPIB adaptor)		



Characteristics

Continuous Wave

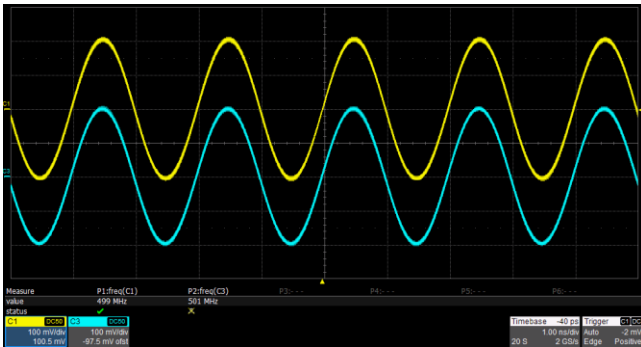

Up to 500MHz continuous sine wave.

Pulse

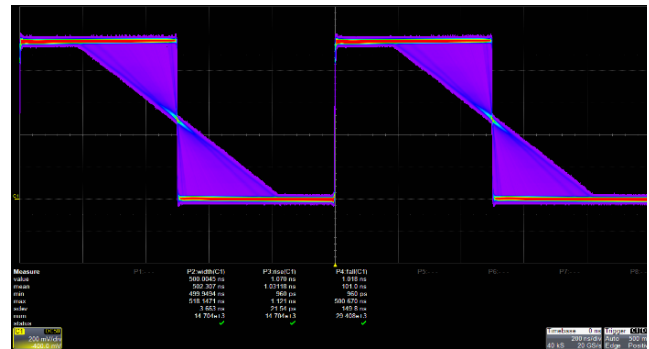
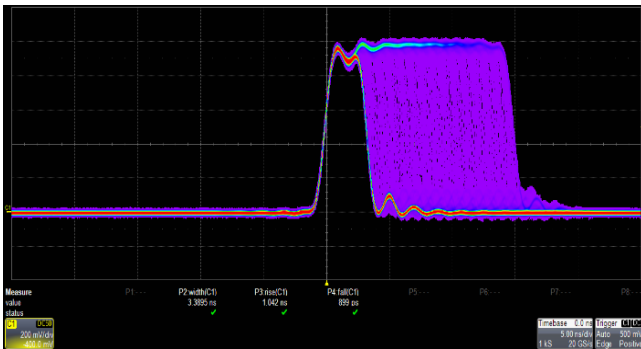


Adjustable Pulse Width

The pulse width can be fine-tuned to the minimum of 3.3 ns with an adjustment step as small as 100 ps, at any frequency.

Adjustable Edge


The rise/fall times can be set independently to the minimum of 1ns at any frequency with a minimum adjustment step as small as 100 ps.

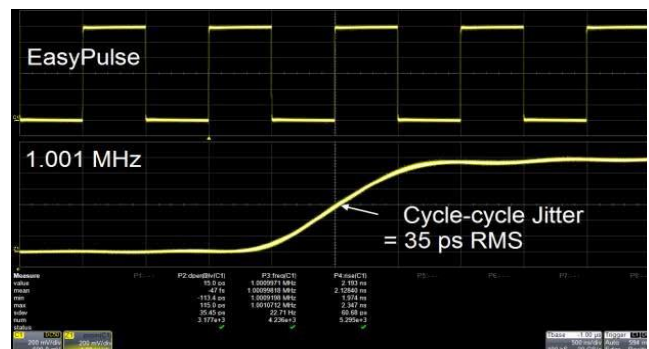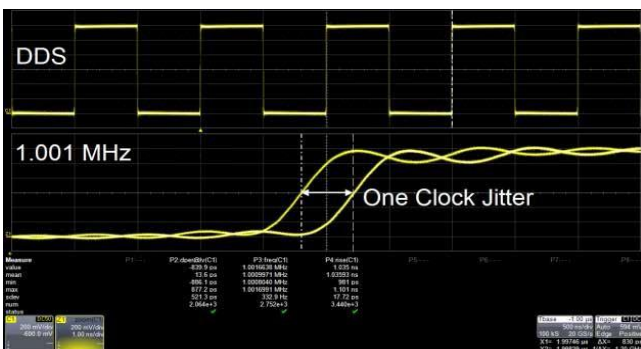

Low Jitter

When a Square/Pulse waveform is generated by traditional DDS, there can be additional jitter if the sampling rate is not an integer-related multiple of the output frequency. EasyPulse technology successfully overcomes this weakness in DDS designs and helps to produce low jitter Square/Pulse waveforms.

Built-in multi-pulse output function

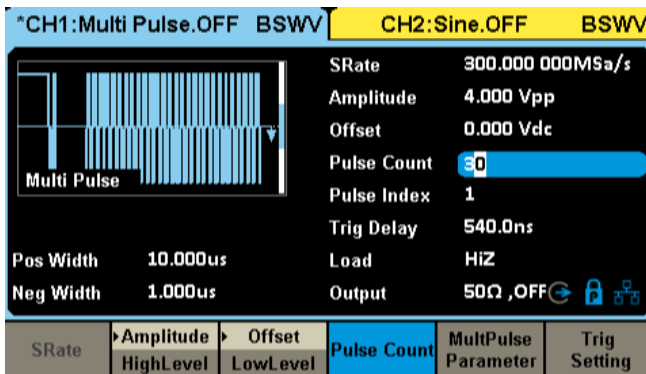


Built-in dual pulse output function, combined with siglent's oscilloscope, can quickly measure the switching parameters and dynamic characteristics of power devices without the need for host computer software.

Supports up to 30 pulses, each pulse can be independently set with pulse edge and positive and negative pulse width.


Arbitrary Waveform

Traditional DDS designs can lead to additional jitter and distortion when sourcing arbitrary waveforms. The SIGLENT TrueArb design minimizes jitter and distortion to help deliver high fidelity arbitrary waveforms.

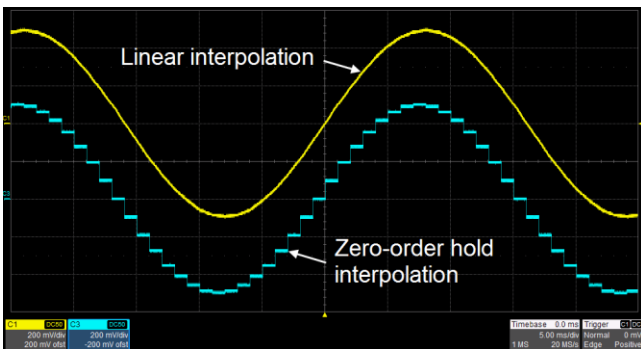


Point by Point Output

TrueArb generates arbitrary waveforms point-by-point. It never skips any point so that it can reconstruct all the details of the waveform, as defined. Two interpolation modes are available: linear and zero-order hold.

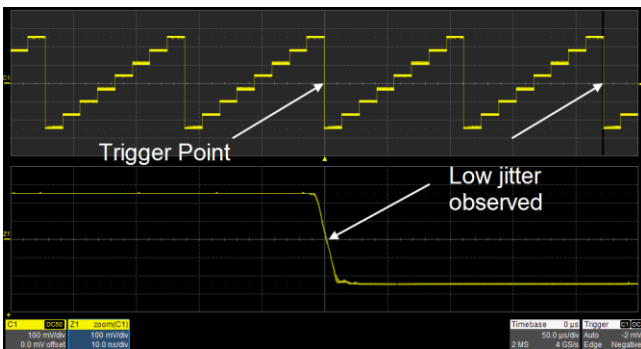

Low Jitter


As with EasyPulse, TrueArb effectively overcomes the clock jitter that can affect traditional DDS generators.

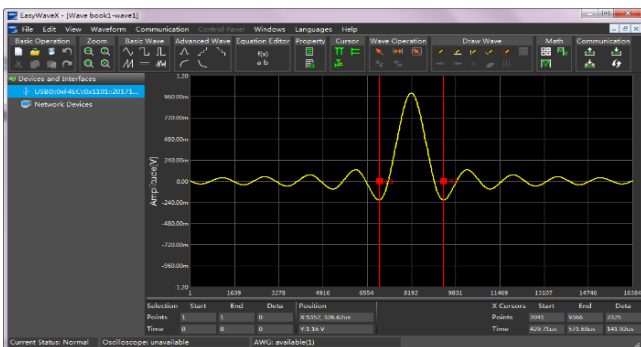

Arbitrary Waveform Software EasyWaveX

EasyWaveX is an arbitrary waveform software platform that supports waveform creation and editing. It features manual drawing, as-well- as line, equation, and coordinate editing modes. It is also a convenient way for users to edit their own arbitrary waveforms.

Sequence playback function

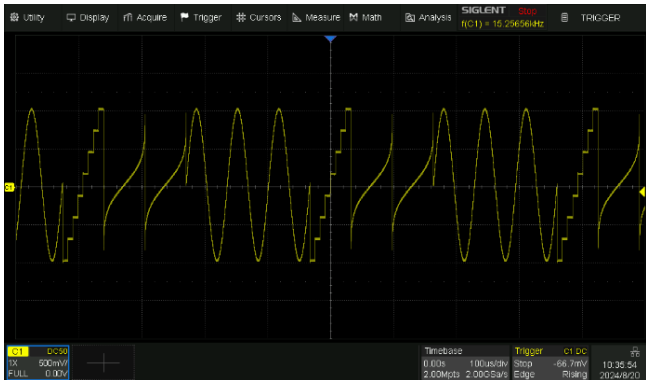

Provides sequence playback function to easily meet various testing needs. Maximum waveform storage depth reaches 20 Mpts/ch.

*CH1:Sequence.OFF BSWV | CH2:Sine.OFF BSWV


#1 StairUp	#2 ErfInv
#3 sine	

Length 32 768 Data Size 32 768 pts
 Loop 1 Amplitude 4.000 Vpp
 Goto 3 Offset 0.000 Vdc


ADD Seg Del Seg Insert Seg Clear List Seg Setting return

Easily set the number of cycle times for each waveform and the order of waveform playback.
 Two operating modes: continuous and single.
 Three trigger sources are available: "internal", "external" and "manual".

Noise


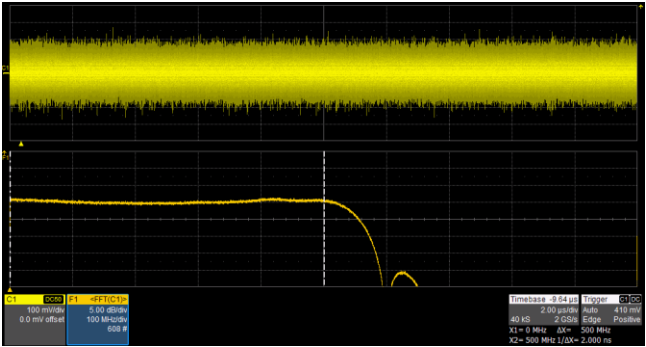


Gaussian noise with bandwidth up to 500 MHz. The repetition period is more than 100 years, and the bandwidth is adjustable.

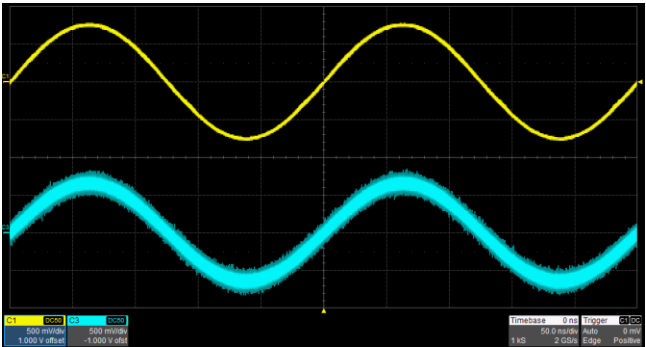


Wideband Gaussian noise can be easily added to other waveforms to simulate real-world scenarios in which the signal contains a large degree of noise.

IQ (optional)

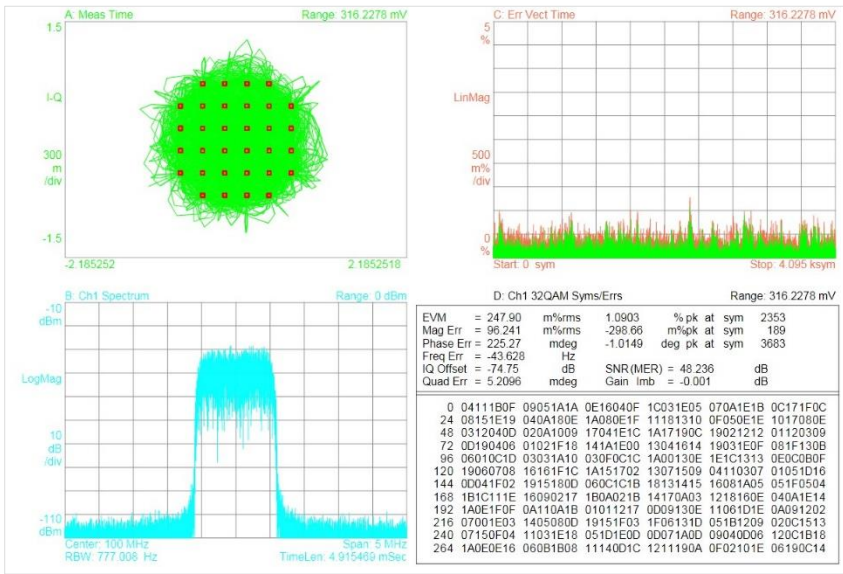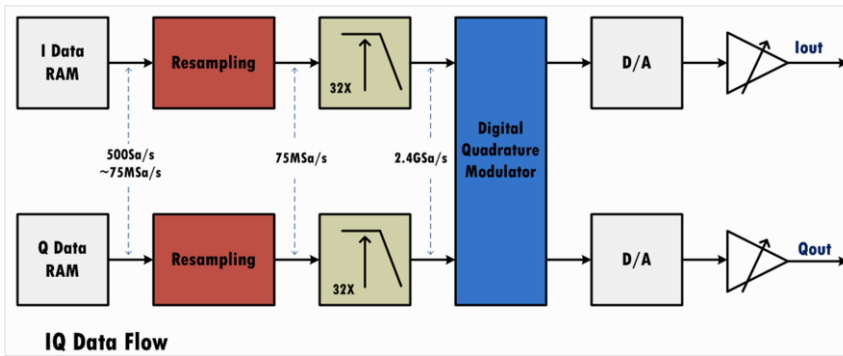


The SDG6000X supports popular modulation types such as ASK, FSK, PSK, and QAM. Proprietary resampling technology provides excellent EVM performance at arbitrary symbol rates between 250 Symb/s ~ 37.5 MSymb/s. Built-in digital quadrature modulator provides the possibility to generate IQ signals from baseband to 500 MHz intermediate frequency.

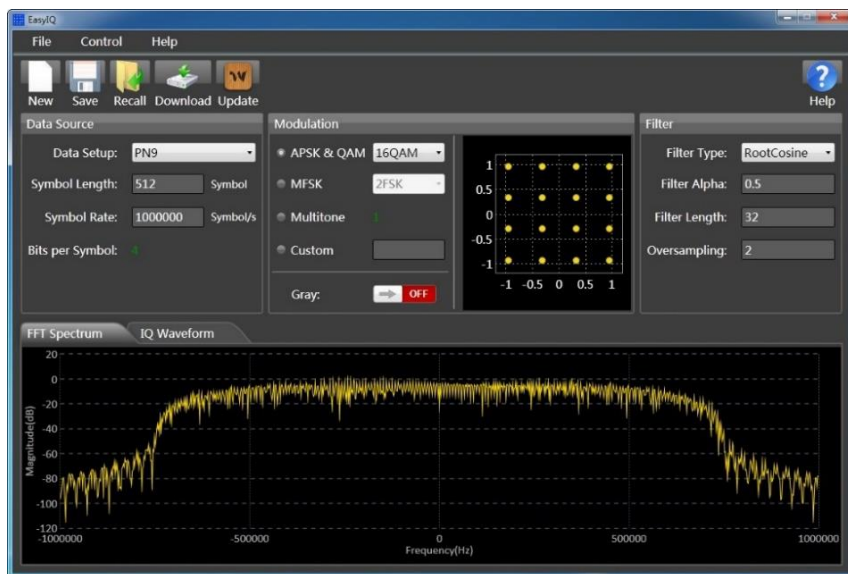


IQ waveforms can be generated by the PC software EasyIQ.

PRBS

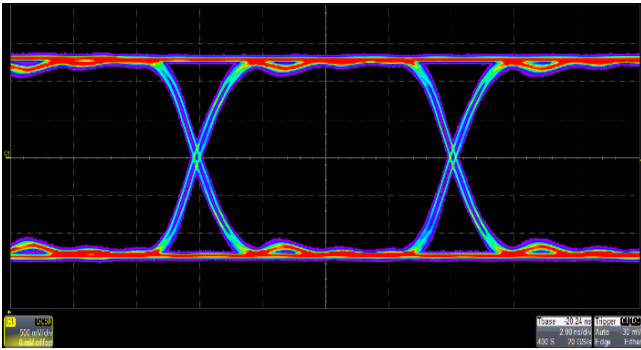


PRBS3 ~ PRBS32 with finely adjustable 10^{-6} bps ~ 300 Mbps bit rate and 1 ns ~ 1us edge.

CH1: PRBS.ON.50Ω		CH2: PRBS.ON.50Ω	
		Bit Rate	122.880 000Mbps
		Amplitude	800.0mVpp
		Offset	850.0mVdc
		Length	PRBS-30
		Rise/Fall	2.0ns
		Load	50 Ω
		Output	ON
TTL/CMOS	LVTTTL LVCMOS	ECL	LVPECL
			LVDS
		Differential ON	

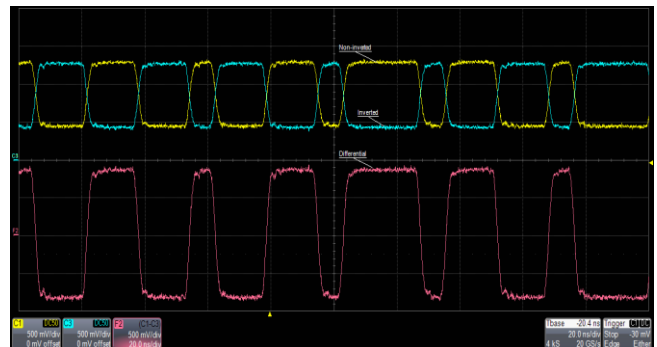


Preset common logic levels such as TTL, LVCMOS, LVPECL and LVDS. An added differential mode provides an easy way to generate differential signals using the both channels.

High Fidelity Output with 80dB Dynamic Range

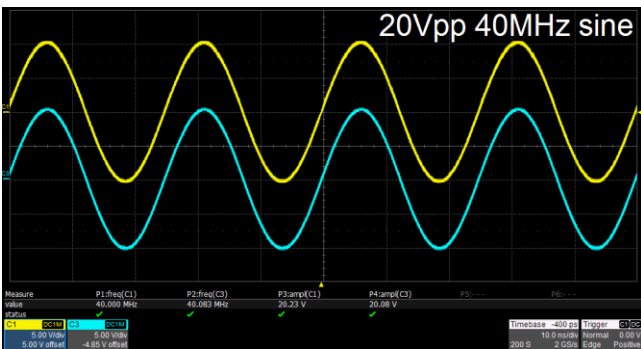

Large Signals at High Frequencies


Dual-channel, 20 Vpp amplitude sine wave guaranteed at up to 40 MHz.

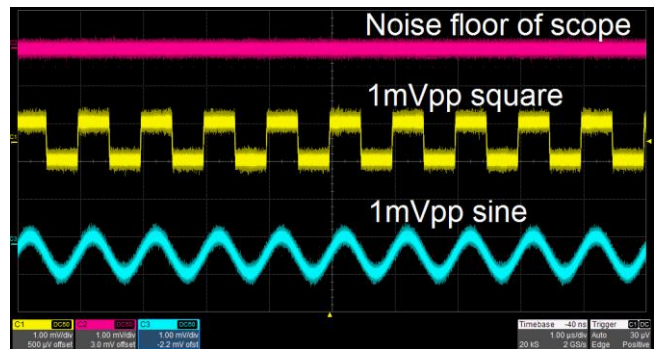

Small Signals


Low noise floor, improves signal-to-noise ratio.

Complex Signals Generation

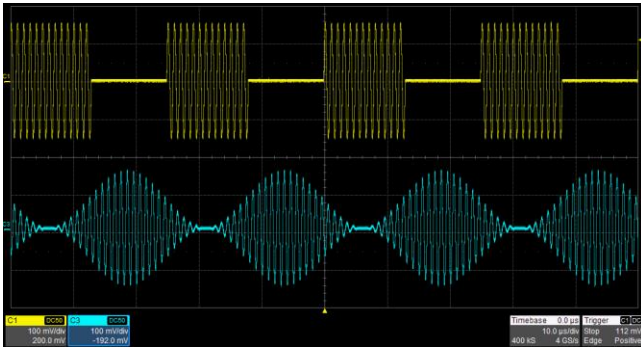


Modulation

Plenty of modulation types, such as AM, FM, PM, FSK, ASK, PSK, DSB-AM, PWM are supported. The modulation source can be configured as "Internal" or "External".

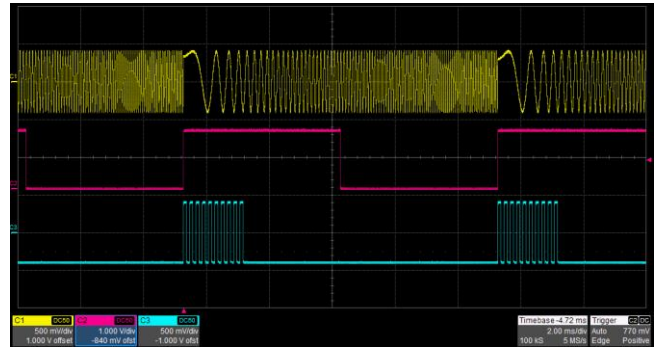


Sweep and Burst

Sweep modes include "Linear", "Log" and "Step". Burst modes include "N cycle" and "Gated". Both Sweep and Burst can be triggered by "Internal", "External" or "Manual" source.

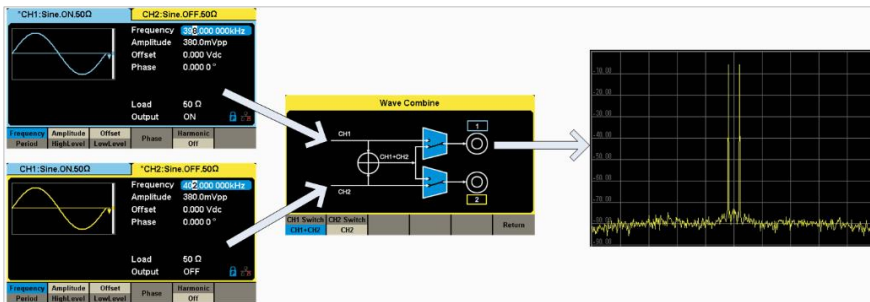

Waveform Combining


The waveform combining function superimposes CH1 and CH2 waveforms internally and provides the combined waveform to a user-selected output. Easily combine basic waveforms, random noise, modulation signals, sweep signals, burst signals, EasyPulse waveforms and TrueArb waveforms.

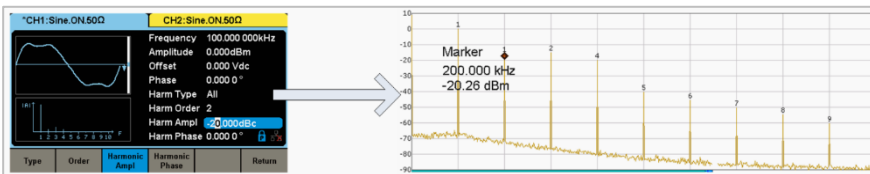

Harmonics Function


Harmonics function gives you the ability to add higher-order elements to your signal.

Two Dual-channel Operation Mode

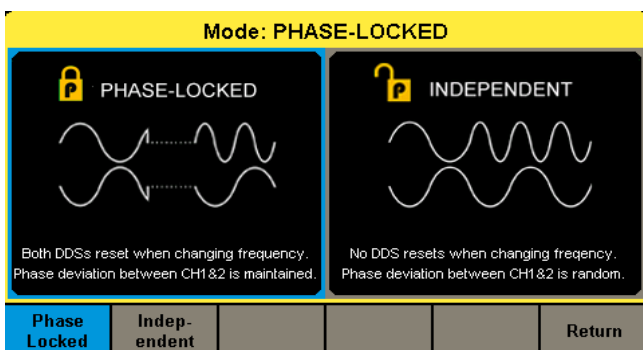

"Phase-Locked" mode automatically aligns the phases of each output. While "Independent" mode permits the two channels to be used as two independent generators. Independent mode also smoothes parameter (frequency, amplitude) changes made to an active channel.

Frequency Counter

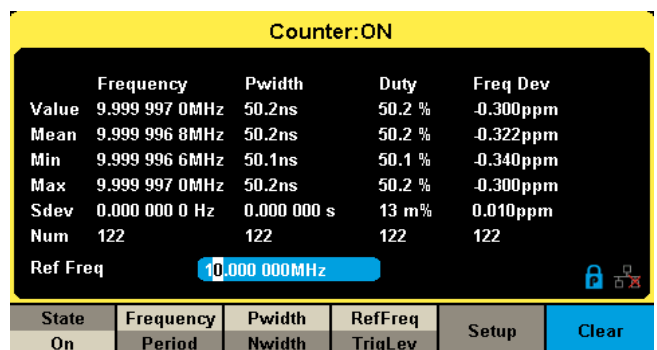

8-digit hardware frequency counter with statistics function and input range of 0.1 Hz ~ 400 MHz.

Specifications

All specifications apply to both channels. Unless otherwise stated, all specifications are not guaranteed unless the following conditions are met:

- The generator is within the valid calibration period
- The generator has been working continuously for at least 30 minutes at a specified temperature (18 °C ~ 28 °C)

Frequency					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Resolution	1 μ		Hz		
Initial accuracy	-1		+1	ppm	25 °C
	-2		+2	ppm	0 ~ 40 °C
1st-year aging	-1		+1	ppm	25 °C
10-year aging	-3.5		+3.5	ppm	25 °C

Sine					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Frequency	1 μ		500M	Hz	SDG6052X
	1 μ		350M	Hz	SDG6032X
	1 μ		200M	Hz	SDG6022X
Harmonic distortion			-65	dBc	0 dBm, 0 ~ 1 MHz (included)
			-60	dBc	0 dBm, 1 ~ 60 MHz (included)
			-50	dBc	0 dBm, 60 ~ 100 MHz (included)
			-40	dBc	0 dBm, 100 ~ 200 MHz (included)
			-30	dBc	0 dBm, 200 ~ 300 MHz (included)
			-28	dBc	0 dBm, above 300 MHz
Total Harmonic Distortion			0.075	%	0 dBm, 10 Hz ~ 20 kHz
Non-harmonic spurious			-60	dBc	0 dBm, \leq 350 MHz
			-55	dBc	0 dBm, > 350 MHz
Output Range (Note)	2 m		20	Vpp	\leq 40 MHz, HiZ load
	2 m		10	Vpp	40 MHz ~ 120 MHz (included), HiZ load
	2 m		5	Vpp	120 MHz ~ 160 MHz (included), HiZ load
	2 m		3	Vpp	160 MHz ~ 350 MHz (included), HiZ load
	2 m		1.28	Vpp	above 350MHz, HiZ load
Harmonics Order			16		
Type	Even, Odd, All				

Note: The specification will be divided by 2 while applied to a 50 Ω load.

Pulse					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Frequency	1 μ		150 M	Hz	SDG6052X, SDG6032X
	1 μ		80 M	Hz	SDG6022X
Pulse Width	3.3			ns	SDG6052X, SDG6032X
	3.4			ns	SDG6022X
Pulse width resolution	100		ps		
Pulse width accuracy			$\pm(0.01\%+0.3\text{ns})$		
Rise time (setting range)	1 n		75	s	SDG6052X, SDG6032X 10% ~ 90%, 100 ps resolution
	2 n		75	s	SDG6022X 10% ~ 90%, 100 ps resolution
Fall time (setting range)	1 n		75	s	SDG6052X, SDG6032X 90% ~ 10%, 100 ps resolution
	2 n		75	s	SDG6022X 90% ~ 10%, 100 ps resolution
Rise time (specified range)	2 n		75	s	10% ~ 90%, 100 ps resolution. Overshoot, jitter, output range and pulse width accuracy specifications are only guaranteed in specified rise/fall times range
Fall time (specified range)	2 n		75	s	
Rise/fall times resolution	100		ps		
Overshoot			3	%	100 kHz, 1 Vpp, 50 Ω load, 2 ns edge
Duty cycle	0.001		99.999	%	Limited by frequency setting
Duty cycle resolution	0.001		%		
Jitter (rms) cycle to cycle			100	ps	1 Vpp, 50 Ω load
Output Range (Note)	2 m		20	Vpp	≤ 20 MHz, HiZ load, 2ns edge, ≥ 10 ns width
	2 m		10	Vpp	20 MHz ~ 120 MHz (included), HiZ load, 2ns edge, ≥ 10 ns width
	2 m		5	Vpp	Above 120 MHz, HiZ load, 2ns edge, ≥ 10 ns width

Note: The specification will be divided by 2 while applied to a 50 Ω load.

Square					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Frequency	1 μ		120 M	Hz	SDG6052X, SDG6032X
	1 μ		80 M	Hz	SDG6022X
Rise / fall times		2	2.4	ns	10% ~ 90%, 1 Vpp, 50 Ω load
Overshoot			3	%	100 kHz, 1 Vpp, 50 Ω load
Duty cycle	10		90	%	Limited by frequency setting
Jitter (rms) cycle to cycle			100	ps	1 Vpp, 50 Ω load
Output Range (Note)	2 m		20	Vpp	≤ 20 MHz, HiZ load
	2 m		10	Vpp	Above 20 MHz, HiZ load

Note: The specification will be divided by 2 while applied to a 50 Ω load.

Ramp					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Frequency	1 μ		5 M	Hz	
Symmetry	0		100	%	
Linearity			1	%	Percentage of peak output, 1 kHz, 1 Vpp, 50% symmetry
Output Range (Note)	2 m		20	Vpp	

Note: The specification will be divided by 2 while applied to a 50 Ω load.

Noise					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Bandwidth (-3dB)		500		MHz	SDG6052X
		350		MHz	SDG6032X
		200		MHz	SDG6022X
Bandwidth setting range	1 m		BW	Hz	BW is the max. frequency
Output Range (Note)	2 m		1.084	Vrms	Mean = 0 Bandwidth limit = OFF

Note: The specification will be divided by 2 while applied to a 50 Ω load.

Arbitrary Wave					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Frequency setting range	1 μ		50 M	Hz	
Waveform length	32		20 M	pts	
Sampling rate	1 u		300 M	Sa/s	TrueArb mode
	1.2 G			Sa/s	DDS mode
Vertical resolution		16		bit	
Rise/fall times		2.6		ns	10% ~ 90%, 1Vpp step signal, DDS mode
Jitter (rms) cycle to cycle			100	ps	1 Vpp, 50 Ω load, TrueArb mode
Output Range (Note)	2 m		20	Vpp	\leq 20 MHz, HiZ load
	2 m		10	Vpp	Above 20 MHz, HiZ load

Note: The specification will be divided by 2 while applied to a 50 Ω load.

Multi Pulse					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Sampling rate		300 M		Sa/s	
Pulse Count			30		
Width	10			ns	Positive and negative pulse widths can be set separately
Edge		3		ns	1Vpp , 50 Ω load, 300 MSa/s

DC					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Output Range	-10		10	V	HiZ load
	-5		5	V	50Ω load
Accuracy			±(1%+2 mV)		HiZ load

Sequence					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Sampling rate	1u		300 M	Sa/s	
Waveform length	32		20 M	pts	
Waveform Count			1024		
Interpolation mode	0-order hold , linear				
Sequence	Run mode: Continuous, Step				

IQ (optional)					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Symbol rate	250		37.5 M	Symb/s	Limited by the oversampling factor
Vertical resolution	16		bit		
Modulation type	2ASK, 4ASK, 8ASK, BPSK, QPSK, 8PSK, DBPSK, DQPSK, D8PSK, 8QAM, 16QAM, 32QAM, 64QAM, 128QAM, 256QAM, 2FSK, 4FSK, 8FSK, 16FSK, MSK, MultiTone, custom				Supported by EasyIQ software
Pattern	PN7, PN9, PN15, PN23, User file, Custom				Supported by EasyIQ software
Output Range	1 m		0.5	Vrms	$\sqrt{I^2 + Q^2}$, 50Ω load
Carrier frequency			500 M	Hz	SDG6052X
			350 M	Hz	SDG6032X
			200 M	Hz	SDG6022X

PRBS					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Bit rate	1 u		300 M	bps	SDG6052X, SDG6032X
	1 u		160 M	bps	SDG6022X
Sequence length	2m-1, m = 3, 4, ... , 32				
Rise/fall times	1 n		1 u	s	SDG6052X, SDG6032X. 10% ~ 90%, 1 Vpp, 50Ω load
	2 n		1 u	s	SDG6022X. 10% ~ 90%, 1 Vpp, 50Ω load
Output Range (Note)	2 m		20	Vpp	≤ 40 Mbps, HiZ load
	2 m		10	Vpp	40 ~ 240 Mbps (included), HiZ load
	2 m		5	Vpp	Above 240 Mbps, HiZ load

Note: The specification will be divided by 2 while applied to a 50Ω load.

Output					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Accuracy	$\pm(1\%+1\text{mVpp})$				10 kHz sine, 0 V offset
Amplitude flatness	-0.3		+0.3	dB	50 Ω load, 0.5 Vpp, compare to 1MHz Sine
Output impedance	49.5	50	50.5	Ω	100 kHz sine
Output current	-200		200	mA	
Crosstalk			-60	dBc	CH1=CH2=0 dBm, Sine, 50 Ω load
Protection	Current limiting, Over voltage protection				
Current-limit threshold		± 200		mA	
Over voltage protection threshold	± 3.5	± 4	± 4.5	V	The amplitude of the generator < 3.2Vpp and the DC offset < 2VDC
	± 10.5	± 11	± 11.5	V	The amplitude of the generator $\geq 3.2\text{Vpp}$ or the DC offset $\geq 2\text{VDC} $

Modulation					
AM					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Carrier	Sine, Square, Ramp, Arb				
Modulation source	Internal/External				
Modulation wave	Sine, Square, Ramp, Noise, Arb				
Modulation depth	0		120	%	
Modulation frequency	1 m		1 M	Hz	While modulation source is "Internal"
FM					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Carrier	Sine, Square, Ramp, Arb				
Modulation source	Internal/External				
Modulation wave	Sine, Square, Ramp, Noise, Arb				
Frequency deviation	0		0.5*BW		BW is the max. frequency. Limited by frequency setting
Modulation frequency	1 m		1 M	Hz	While modulation source is "Internal"
PM					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Carrier	Sine, Square, Ramp, Arb				
Modulation source	Internal/External				
Modulation wave	Sine, Square, Ramp, Noise, Arb				
Phase deviation	0		360	$^{\circ}$	
Modulation frequency	1 m		1 M	Hz	While modulation source is "Internal"
ASK					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Carrier	Sine, Square, Ramp, Arb				
Modulation source	Internal/External				

Modulation wave	Square with 50% duty cycle				
Keying frequency	1 m		1M	Hz	While modulation source is "Internal"
FSK					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Carrier	Sine, Square, Ramp, Arb				
Modulation source	Internal/External				
Modulation wave	Square with 50% duty cycle				
Keying frequency	1 m		1M	Hz	While modulation source is "Internal"
PSK					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Carrier	Sine, Square, Ramp, Arb				
Modulation source	Internal/External				
Modulation wave	Square with 50% duty cycle				
Keying frequency	1 m		1M	Hz	While modulation source is "Internal"
PWM					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Carrier	Pulse				
Modulation source	Internal/External				
Modulation wave	Sine, Square, Ramp, Noise, Arb				
Modulation frequency	1 m		1M	Hz	While modulation source is "Internal"

Burst					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Carrier	Sine, Square, Ramp, Pulse, Noise, Arb				
Type	Count (1-1000000 periods), Infinite, Gated				
Carrier frequency	2 m		BW	Hz	BW is the max. output frequency
Start/Stop phase	0		360	°	
Internal period	1 μ		1000	s	
Trigger source	Internal, External, Manual				
Gated source	Internal/External				
Trigger delay			100	s	

Sweep					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Carrier	Sine, Square, Ramp, Arb				
Type	Linear, Logarithmic, Step				
Direction	Linear: Up, Down, Up & Down Logarithmic: Up, Down				
Carrier frequency	1 μ		BW	Hz	BW is the max. output frequency
Sweep time	5 u		500	s	
Trigger source	Internal, External, Manual				

Frequency Counter					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Function	Frequency, Period, Positive/Negative Pulse Width, Duty Cycle				
Coupling mode	AC, DC, HF REJ				
Frequency range	100 m		400 M	Hz	DC coupling
Input amplitude	1		400 M	Hz	AC coupling
	100 mVrms		±2.5 V		DC coupling, < 100 MHz
	200 mVrms		±2.5 V		DC coupling, 100 MHz ~ 200MHz
	500 mVrms		±2.5 V		DC coupling, Above 200 MHz
	100 mVrms		5 Vpp		AC coupling, < 100 MHz
	200 mVrms		5 Vpp		AC coupling, 100 MHz ~ 200MHz
	500 mVrms		5 Vpp		AC coupling, Above 200 MHz
Input impedance		1M		Ω	

Reference Clock					
10MHz Input					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Frequency	9.999 M	10 M	10.001 M	Hz	
Amplitude	1.4			Vpp	
Input impedance	5			kΩ	AC coupling
10MHz Output					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Frequency		10 M		Hz	Synchronized to internal reference clock
Amplitude	2	3.3		Vpp	HiZ load
Output impedance		50		Ω	

Auxiliary In/Out					
Trigger Input					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
V _{IH}	2		5.5	V	
V _{IL}	-0.5		0.8	V	
Input impedance	100			kΩ	
Pulse width	100			ns	
Response time			1.35	us	Sweep
			1.4	us	Burst
Trigger Output					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
V _{OH}	3.8			V	I _{OH} = - 8 mA
V _{OL}			0.44	V	I _{OL} = 8 mA
Output impedance		100		Ω	

Frequency			1	MHz	
Sync Out					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
VOH	3.8			V	IOH = – 8 mA
VOL			0.44	V	IOL = 8 mA
Output impedance		100		Ω	
Pulse width		26.7		ns	
Jitter		3.3		ns	Peak to peak
Frequency			10	MHz	
Modulation Input					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Frequency	0		50	kHz	
Input impedance	10			kΩ	
Amplitude @100% modulation depth	11	12	13	Vpp	

General					
Power					
Parameter	Min	Typ	Max	Unit	Condition
Voltage	100 - 240 Vrms (± 10%), 50 / 60 Hz 100 - 120 Vrms (± 10%), 400 Hz				
Power consumption		32.5	50	W	Dual channels, Sine, 1kHz, 10Vpp, 50Ω load
Display					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Color depth		24		bit	
Contrast Ratio		350:1			
Luminance		300		cd/m ²	
Touch Screen Type	Resistive				
Environment					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Operating temperature	0		40	°C	
Storage temperature	-20		60	°C	
Operating humidity	5		90	%	≤ 30 °C
	5		50	%	40 °C
Non - operating humidity	5		95	%	
Operating altitude			3048	m	≤ 30 °C
Non–operating altitude			15000	m	
Calibration					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Calibration interval		1		year	

Mechanical					
Parameter	Min.	Typ.	Max.	Unit	Condition & Note
Dimensions	W×H×D = 260.3 mm×107.2 mm×295.7 mm				
Net weight		3.5		kg	
Gross weight		4.6		kg	
Compliance					
LVD	IEC 61010-1:2010				
EMC	EN61326-1:2013				

Ordering Information

Product Description	
SDG6052X	500 MHz, 2-CH, 2.4 GSa/s, 16-bit
SDG6032X	350 MHz, 2-CH, 2.4 GSa/s, 16-bit
SDG6022X	200 MHz, 2-CH, 2.4 GSa/s, 16-bit

Standard Configurations	Quantity
Quick start	1
Power cord	1
Calibration certificate	1
USB cable	1
BNC coaxial cable	2

Optional Configurations	
SPA1010	10W Power Amplifier
ATT-20dB	20 dB Attenuator
USB-GPIB	USB-GPIB Adapter
SDG-RMK	Single Instrument Rack Mount Kit
SDG-6000X-IQ	IQ Signal Generator Function



About SIGLENT

SIGLENT is an international high-tech company, concentrating on R&D, sales, production and services of electronic test & measurement instruments.

SIGLENT first began developing digital oscilloscopes independently in 2002. After more than a decade of continuous development, SIGLENT has extended its product line to include digital oscilloscopes, isolated handheld oscilloscopes, function/arbitrary waveform generators, RF/MW signal generators, spectrum analyzers, vector network analyzers, digital multimeters, DC power supplies, electronic loads and other general purpose test instrumentation. Since its first oscilloscope was launched in 2005, SIGLENT has become the fastest growing manufacturer of digital oscilloscopes. We firmly believe that today SIGLENT is the best value in electronic test & measurement.

Headquarters:

SIGLENT Technologies Co., Ltd
Add: Bldg No.4 & No.5, Antongda Industrial
Zone, 3rd Liuxian Road, Bao'an District,
Shenzhen, 518101, China
Tel: + 86 755 3688 7876
Fax: + 86 755 3359 1582
Email: sales@siglent.com
Website: int.siglent.com

North America:

SIGLENT Technologies America, Inc
6557 Cochran Rd Solon, Ohio 44139
Tel: 440-398-5800
Toll Free: 877-515-5551
Fax: 440-399-1211
Email: info@siglentna.com
Website: www.siglentna.com

Europe:

SIGLENT Technologies Germany GmbH
Add: Staetzlinger Str. 70
86165 Augsburg, Germany
Tel: +49(0)-821-666 0 111 0
Fax: +49(0)-821-666 0 111 22
Email: info-eu@siglent.com
Website: www.siglenteu.com

Follow us on
Facebook: SiglentTech

